


# EKF 412 N AL U



## ELECTRIC CONVECTION OVEN WITH INDIRECT STEAM

Use: Pastry, Gastronomy

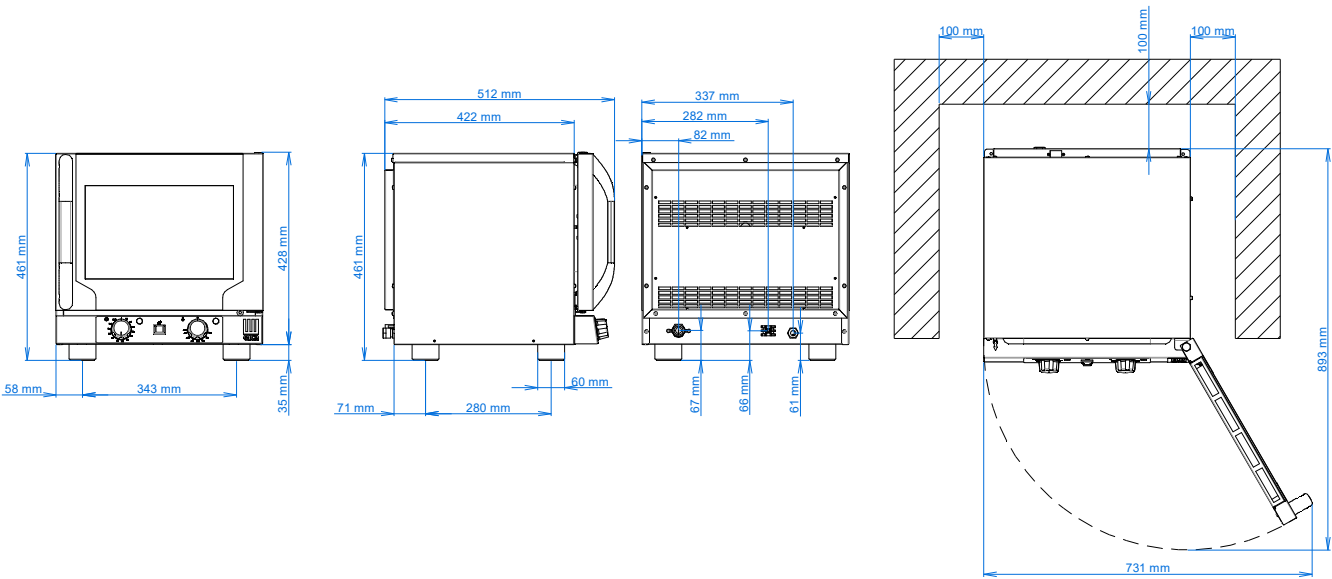

### DIMENSIONAL FEATURES

|                                  |      |     |     |
|----------------------------------|------|-----|-----|
| Oven dimensions (WxDxH mm)       | 463  | 512 | 461 |
| Oven weight (kg)                 | 21,8 |     |     |
| Distance between rack rails (mm) | 25   |     |     |

### ELECTRICAL FEATURES

|                          |                  |
|--------------------------|------------------|
| Power supply (kW)        | 2,6              |
| Frequency (Hz)           | 50/60            |
| Voltage (Volt)           | AC 220/230       |
| N° of motors             | 1 Unidirectional |
| Boiler                   | /                |
| Protection against water | IPX3             |

### FUNCTIONAL FEATURES

|                            |                                                               |
|----------------------------|---------------------------------------------------------------|
| Power                      | Electricity                                                   |
| Capacity                   | N° 4 trays/grids 1/2 GN                                       |
| Type of cooking            | Ventilated                                                    |
| Steam                      | Indirect with button                                          |
| Cooking chamber            | AISI 430 Stainless steel                                      |
| Temperature                | 100 - 260 °C                                                  |
| Temperature control        | Thermostat                                                    |
| Control panel              | Electromechanic – Lower side                                  |
| N° of programs             | /                                                             |
| Programmable cooking steps | /                                                             |
| Pre-heating temperature    | /                                                             |
| Pre-heating function       | /                                                             |
| Door                       | Right side opening door<br>Ventilated<br>Inspectionable glass |
| Modularity                 | Available                                                     |

### EQUIPMENT

|                                     |                                   |     |     |
|-------------------------------------|-----------------------------------|-----|-----|
| Cardboard box dimensions (WxDxH mm) | 545                               | 620 | 468 |
| Aluminium tray 1/2 GN               | 2 pcs (cod. KV4)                  |     |     |
| Horizontal chromed grid 1/2 GN      | 2 pcs (cod. EKG4)                 |     |     |
| Lateral supports                    | 1 right + 1 left                  |     |     |
| Cable                               | Single-phase [3G 1,5] - L=1600 mm |     |     |