



LUX PRO 700 - MULTIFUNCTION

LXMFE74A



MULTIFUNCTION BRATT PAN EL. ON OPEN STA


TECHNICAL DATA:

External dimensions - WxDxH (cm)	40x73x85
Tank dimensions - WxDxH (cm)	31x45.5(37)x15.7
Total power (kW)	4.7
Capacity (lt)	15
IPX5	■

ADDITIONAL TECHNICAL DATA:

Supply (N)	400V 3N 50/60Hz
Weight (kg)	58
Volume (m3)	0.5

The multifunction allows you to carry out a great variety of cookings, thanks to its multiple use as a braising pan, frytop, pasta cooker, bain-marie. The AISI 304 stainless steel tank, with a 10 mm bottom, ensures uniform cooking and a low heat dispersion. The temperature control is made through an operating and safety thermostat (90-300°C). Armored electrical heating elements. Solenoid valve for water loading. A standard AISI 304 stainless steel lid for the bowl with thermal handle. The used product can be discharged directly into the compartment via a discharge pipe and by easily removing the Teflon cap (standard). The product is collected in an AISI 304 stainless steel basin with a special lid with hole, present in the compartment, which slides on nickel-plated steel guides (all standard).

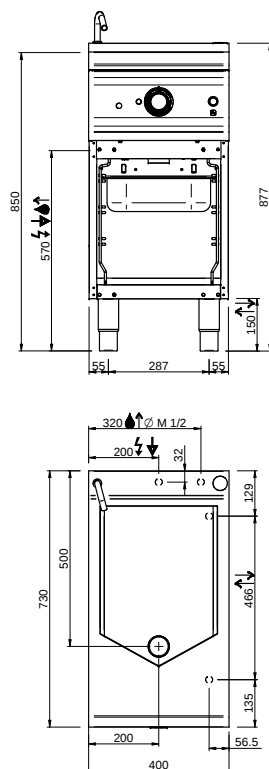

LEGENDA SIMBOLI / LEGEND



INGRESSO GAS / GAS INLET
(EN 10226-1) Ø M 1/2"



ALIMENTAZIONE ELETTRICA /
POWER SUPPLY



INGRESSO ACQUA /
WATER INLET Ø M 1/2"



SCARICO ACQUA / OLII
WATER / OILS DRAIN



ATTACCO EQUIPOTENZIALE /
EQUIPOTENTIAL



REGOLAZIONE PIEDINI /
FEET ADJUSTMENT (h 0/+50)