
PGL7610-R290
MATERIAL AND TECHNICAL CHARACTERISTICS MANUEL


INDEX :


1. **CHARACTERISTICS**
2. **INSIDE , OUTSIDE DIMENSIONS**
3 **EXPLODED WIEV**
4 **SPARE PART LIST**
5- **GAS AND ELECTRICAL SCHEMA**


PGL7610-R290
MATERIAL AND TECHNICAL CHARACTERISTICS MANUEL



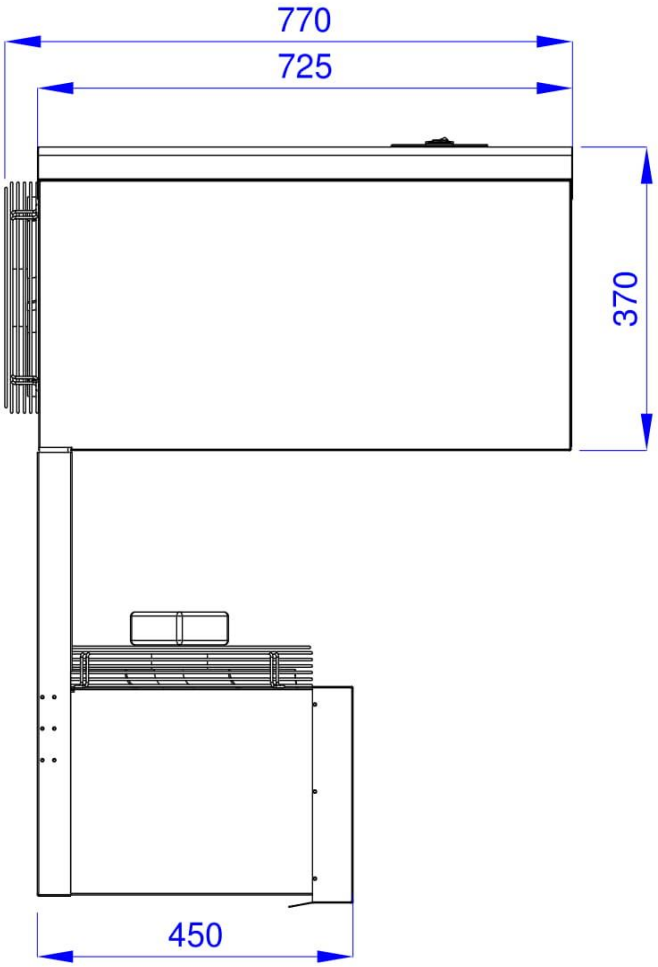

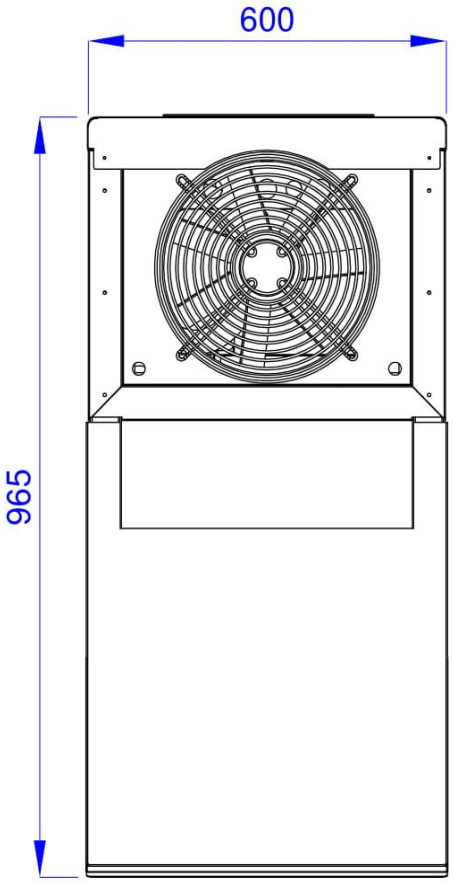

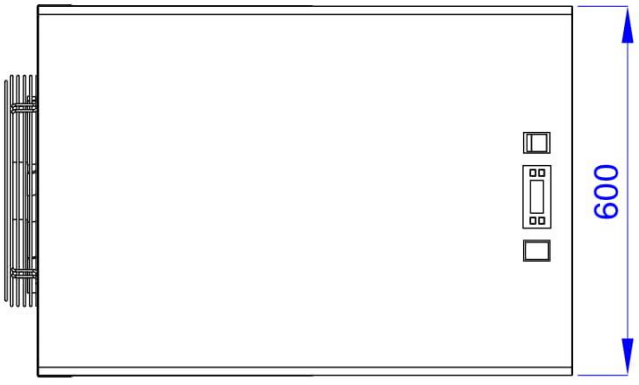

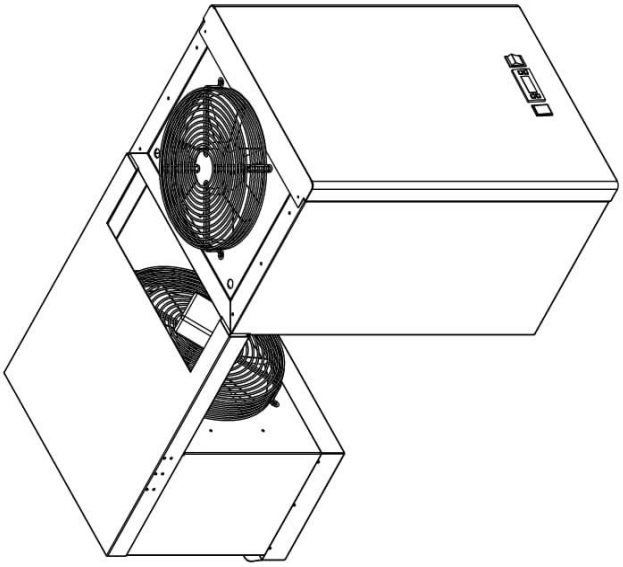


RESİM ADI / TANIM: PGL7610 - R452	RESİM NO		ÇİZEN İLYAS YILMAZ			REV.N° :	Tarih:
	MALZEME		TARİH 05.05.2020	U.M. mm	ÖLÇEK 1:1	Revizyon Sebebi:	
VERİLMEYEN TOLERANS DEGERLERI 7226 - 73 (±0.2)	ÖLÇÜLER		KONTROL BAHRI INCEÇAM				

PGL7610-R290 SPECIALITIES

Climate Class	:T
Safety Class	:1
Working Tempature C	:0C / -20C
Thermostate Set Tempature	:-20C
Environment Tempature	:+43C
Environment Moisture Propertion	:%65
Energy Consuption	:0,67 KW/h
Power	:2 HP
Voltage- Frekans	:380V / 50-60 Hz
Digital Thermometer	:WP-Digital
Energy Lamp	:Ad / PCC1

TECHNICAL CHARACTERISTICS


Outside Dimensions	:600x965x770mm
Package Dimensions	:1060x690x995mm
Cooling Capacity	:7.6m³ / 10.0 m³
Gross Weight	:115 kg
Net Weigt	:105 kg
Insulation Metarial Volume	: 42 Kg / m3 +/-1
Compresor	: NT 2210 U R290 50 HZ KOMPRESÖR
Condanser	: Kondanser (7.6m³-15.0m³)
Condanser Fan	: SOĞUK ODA Ø 300 FAN S4E 300 AS 7280
Evaporatör	: Evap (7,6-15,0 m3)-DİFRİZ
Evaporatör Fan	: S.ODA DİFRİZ A2E250-AE65-01 FAN AA
Dryer	: GMC--3/8" (SC083S) 45bar
Refrigerant	: R290
Refrigerant Quantity	:200 gr
Certifications	:TS 2225 EN 60335-2-4' ye uygundur.
Serial No	: Packed And Easy Read
Packing	: Wooden Palet İs Down And Covered
Qualty Time	: 2 Years After arriving the end user point. Warranty Certicate and User Manuel With the Unit.

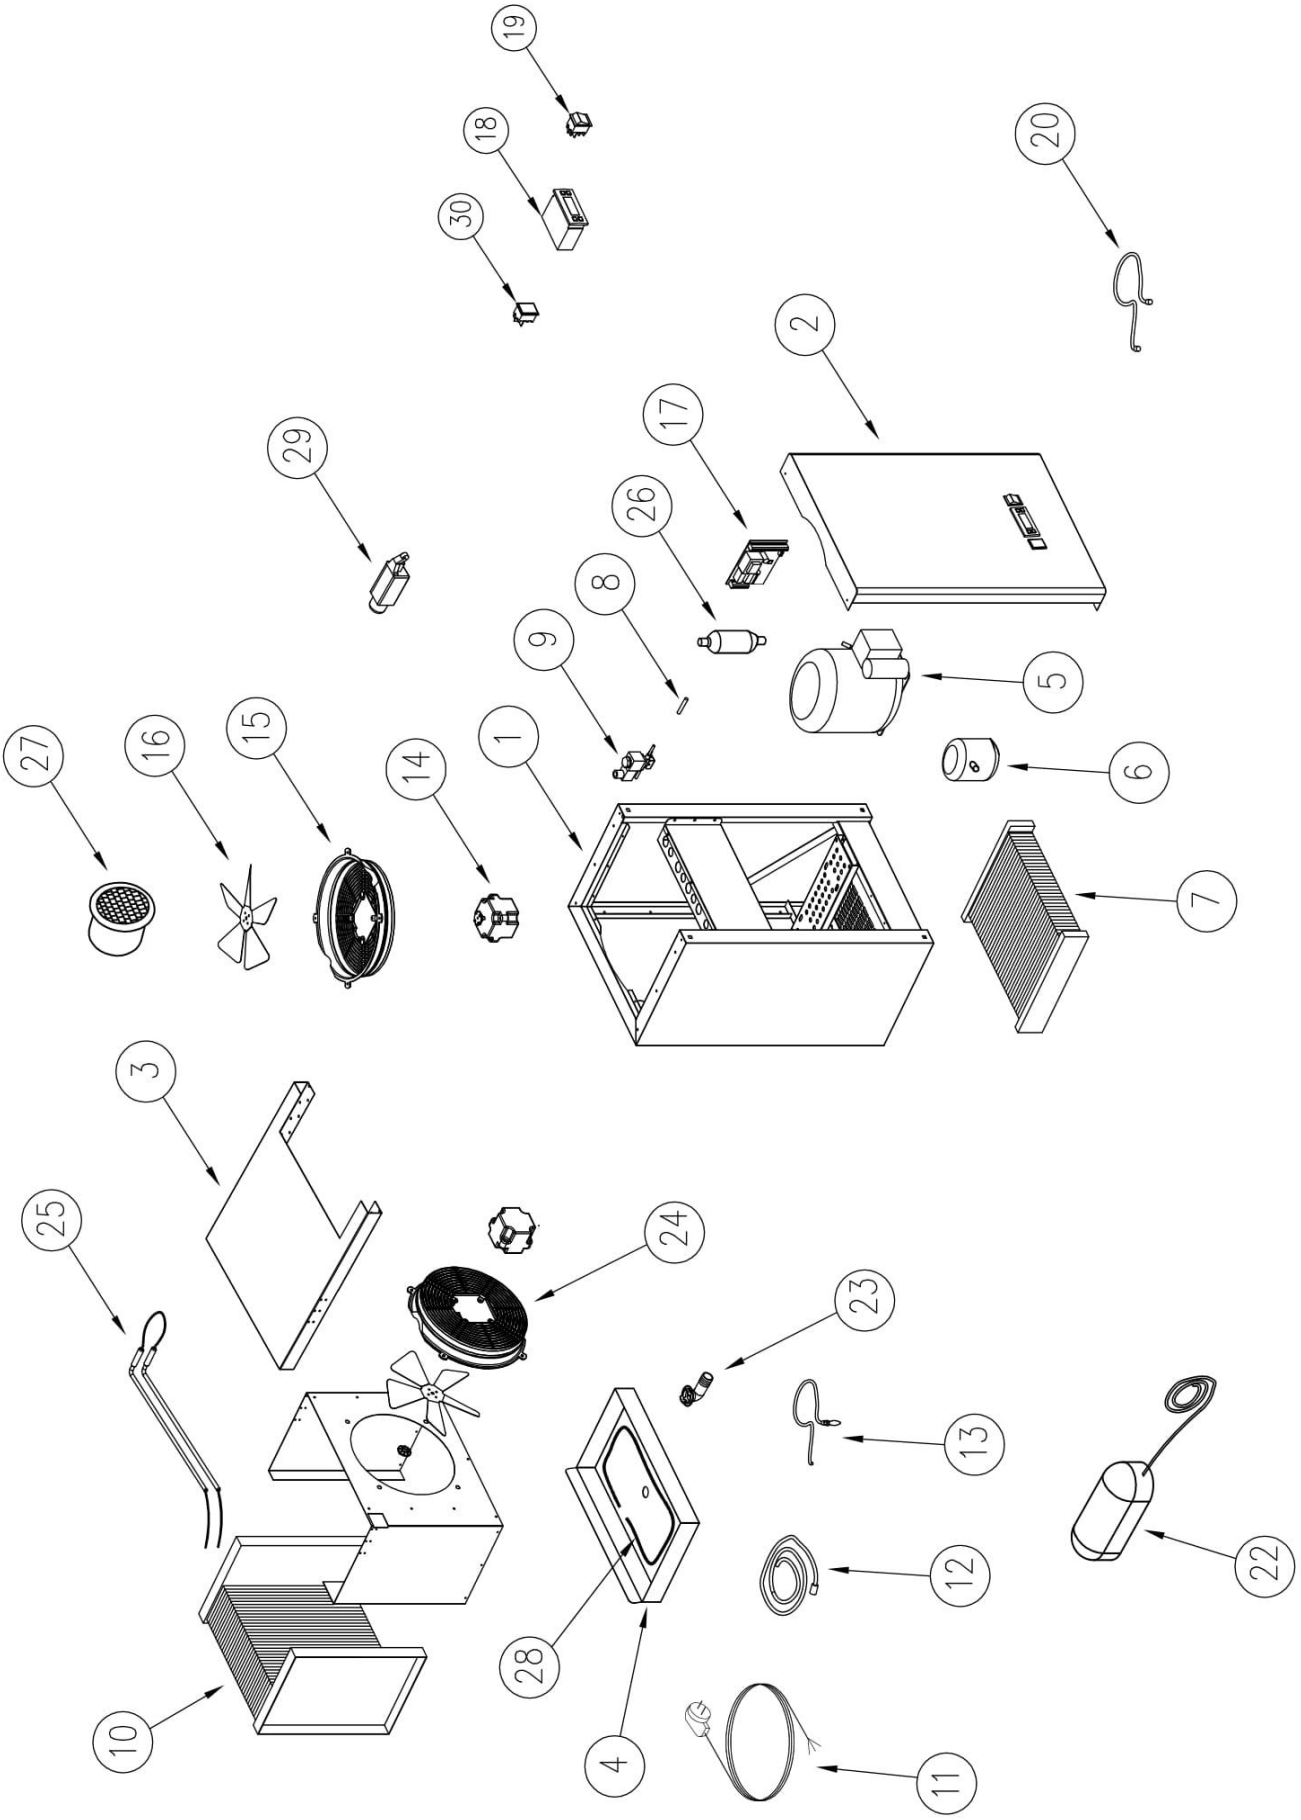


RESİM ADI / TANIM: PGL7610 - R452	RESİM NO		ÇİZEN İLYAS YILMAZ		REV.N° : Tarih:
	MALZEME		TARİH 05.05.2020	U.M. mm ÖLÇEK 1:1	Revizyon Sebebi:
VERİLMEYEN TOLERANS DEGERLERI 7226 - 73 (±0.2)	ÖLÇÜLER		KONTROL BAHRI INCEÇAM		

PGL7610-R290 SPARE PART LIST

NO	ARTICLE CODE	MATERIAL NAME	QTY
1	SG20115200	COOLING GROUP BODY SHEET	1
2	SG20115205	COOLING GROUP CANOPY SHEET	1
3	SG20115203	COOLING GROUP EVAP SHEET	1
4	SG20115202	WATER BOX	1
5	A00KO212	NT 2210 U R290 50 HZ COMPRESSOR	1
6	B00LT100	LIQUID TANK	1
7	A00KN115	CONDENSER--(7,6-15,0 m3)	1
8	INDEX :	EXPENSION VALVE NEEDLE	1
9	B00EX100	EXPENSION VALVE	1
10	A00EV145	EVAP--(7,6-15,0 m3) DEEP	1
11	B00FK100	PLUG CABLE	1
12	A00DJ109	PROP (3mt)	1
13	A00DJ102	PROP (1,5mt)	1
14	A00FA112	CONDENSER FAN	1
15	A00EP101	FAN PLASTIC	1
16	A00FA119	EVAPORATOR FAN	1
17	A00DJ103	MOTHERBOARD	1
18	A00DJ100	TWO PROBES DIGITAL	1
19	B00DU102	ON-OFF SWITCH	1
20	B00REZ106	WATER EVAPORATION RESISTOR	1
21	A00DJ108	DISPLAY CONNECTION CABLE	1
22	B00LA142	LED LAMP	1
23	B00EB102	EVAP OUT ELBOW	1
24	A00EP102	COLD ROOM FAN PLASTIC	1
25	B00REZ123	400W--RESISTANCE	2
26	A00DR102	DRAYER 3/8" (GMC)	1
27	B00SL103	PRESSURE VALVE	1
28	B00REZ112	DOOR RESISTANCE 7mt	1
29	B00DU106	DOOR SWITCH	1
30	B00DU101	POWER SWITCH	1

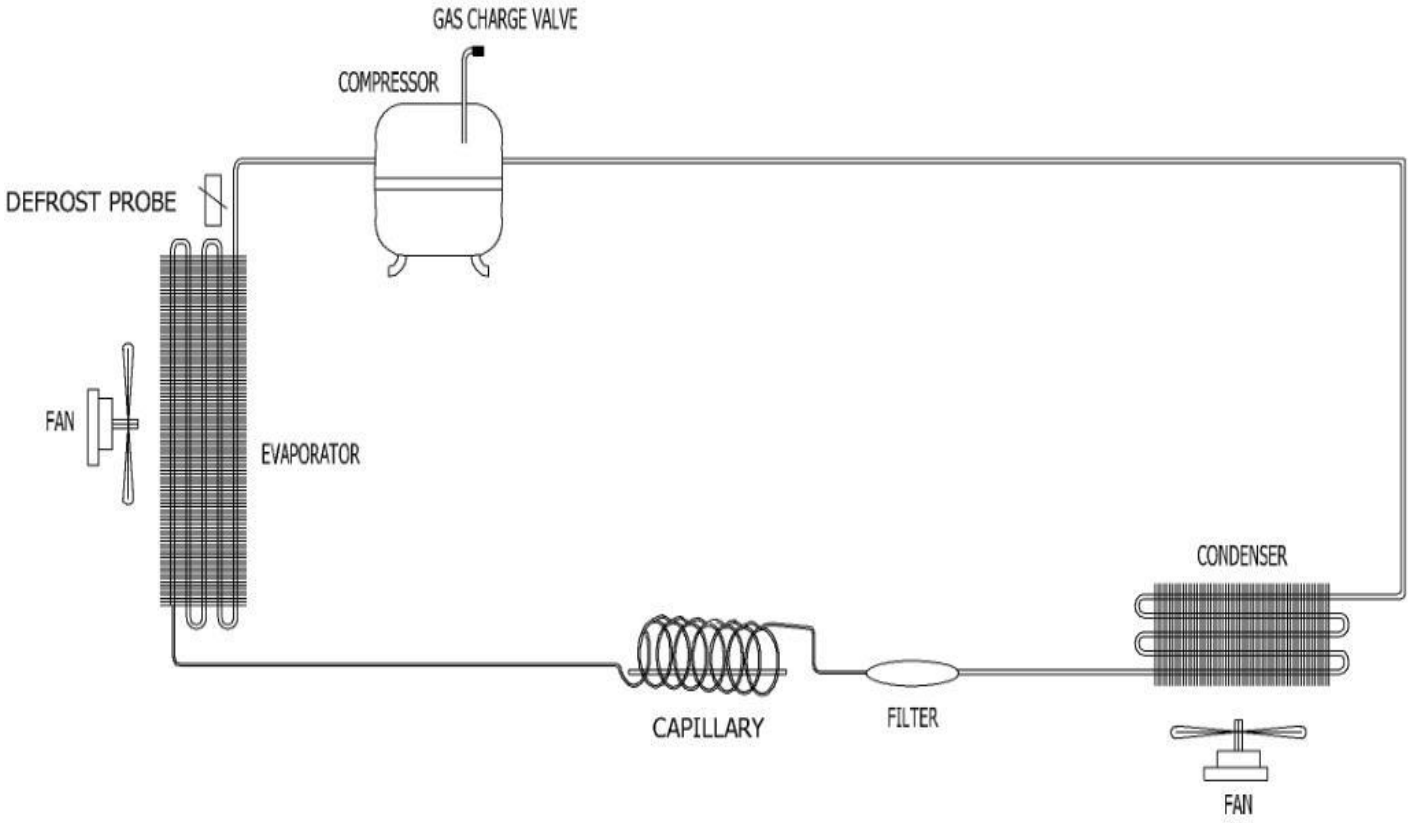

SOĞUK ODA ELEKTRİK ŞEMASI / COLD ROOM ELECTRICAL SCHEMA

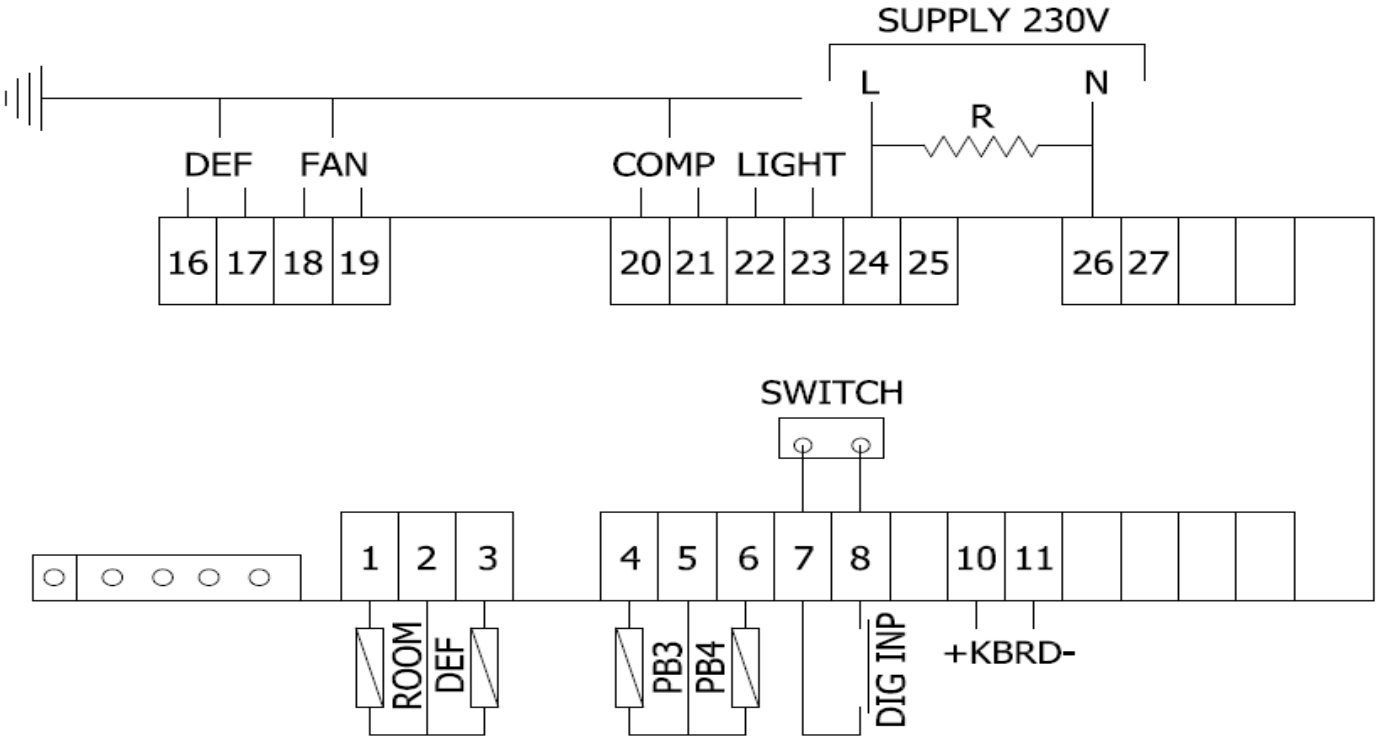

R: KAPI REZISTANSI / DOOR REZISTANCE